

Overview

Peak Force (Fpk)


Product Type		10N	100N	500N	1000N	5000N	10000N	15000N	20000N
Ironless Technology	AUM 1,2,3,4,5,6	[Bar chart showing force range from 10N to 20000N]							
	AWM 1,2,3,4,5	[Bar chart showing force range from 10N to 20000N]							
	ACR 240,335,820,1525	[Bar chart showing force range from 10N to 20000N]							
Iron Core Technology	AJM 30,50,80,100	[Bar chart showing force range from 10N to 20000N]							
	AQM 8,24,30,50,80	[Bar chart showing force range from 10N to 20000N]							
	AKM 30,50,100,150,200	[Bar chart showing force range from 10N to 20000N]							

Flexible structure design contributes to excellent and simple high-precision control system:

- Multi-carriage structure
- Optional moving track design instead of moving coil, eliminating cable management and potential cable damage
- Multiple coils can be connected in series or parallel to generate higher force and faster speed while maintaining compact size

Please contact Akribis Sales engineers for more details (cust-service@akribis-sys.com).

Applications & Industries: electronics, semiconductor, solar energy, lithium battery, PCB, FPD, HDD, LED, lathe, vehicle electronics, packaging, printing, optics, biomedical and many more.

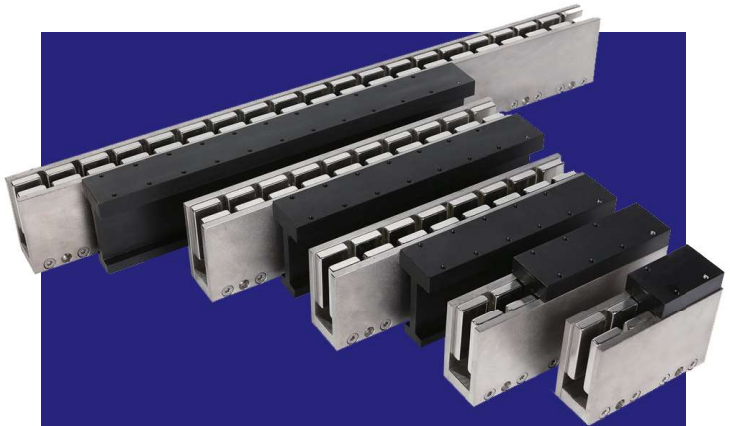

AUM SERIES

- ▶ Ironless technology
- ▶ Zero cogging force
- ▶ Patented technology
- ▶ Small electrical and mechanical constant
- ▶ High continuous force and peak force

Introduction

AUM series Ironless DC brushless linear motors are compact in size but high in force density, achieving larger thrust force.

F_{cn} (Continuous force) = 3N ~ 2340N

F_{pk} (Peak force) = 11.9N ~ 16200N

Features

- ▶ Ironless technology and no cogging force
- ▶ High continuous and peak force
- ▶ Optional hall sensors
- ▶ High motor constant
- ▶ Wide range of forces and sizes to choose from
- ▶ Optional air cooling and water cooling configurations

Applications

Applicable to point-to-point micron/nanometer level positioning; unlimited travel stroke with top speed of 5m/s or faster; low velocity ripple during both fast and low speed scanning; precise force control with fine resolution.
 Applications & Industries: high speed and precision machines for positioning, motion profile tracking, velocity controlling used in front-end & back-end wafer handling and inspection, photovoltaic and lithium battery systems, glass and LCD applications, biomedical equipment, printing machines, and laser processing machines.

Model	Coil Length (mm)	Continuous Force (F _{cn}) / Peak Force (F _{pk})							Unit: N
		10	50	100	500	1000	1500	2000	
AUM1-S1 19.0	AUM1-S1	22	3.0 / 11.9						
	AUM1-S2	43	6.0 / 23.8						
	AUM1-S3	64	8.9 / 36.7						
	AUM1-S4	85	11.9 / 47.8						
	AUM1-S5	106	14.9 / 59.5						
AUM2-S1 22.0	AUM2-S1	31	8.8 / 44						
	AUM2-S2	61	17.6 / 88						
	AUM2-S3	91	26.4 / 132						
	AUM2-S4	121	35.2 / 176						
	AUM2-S8	241	26.4 / 362						
AUM3-S1 35.0	AUM3-S1	61	28 / 144						
	AUM3-S2	121	57 / 289						
	AUM3-S3	181	85 / 433						
	AUM3-S4	241	113 / 578						
	AUM3-S6	361	170 / 867						
AUM4-S1 39.0	AUM4-S1	61	55 / 312						
	AUM4-S2	121	110 / 624						
	AUM4-S3	181	166 / 936						
	AUM4-S4	241	221 / 1248						
	AUM4-S5	301	276 / 1560						
AUM5-S1 50.0	AUM4-S6	361	331 / 1872						
	AUM4-S8	481	442 / 2496						
	AUM5-S1	61	98 / 707						
	AUM5-S2	121	197 / 1415						
	AUM5-S3	181	287 / 2112						
AUM6-P5-S4 64.5	AUM5-S4	241	388 / 2830						
	AUM5-S5	301	491 / 3537						
	AUM5-S6	361	590 / 4244						
	AUM5-S8-V107	481	786 / 5869						
	AUM5-S9-V80	757	884 / 6367						
AUM6-P8-S6 212.0	AUM5-S10-V107	841	983 / 7078						
	AUM5-S12-V107	1009	1179 / 8089						
	AUM6-P5-S4	337	780 / 5400						
	AUM6-P8-S6	505	1170 / 8100						
	AUM6-P5-S8	673	1580 / 10800						
AUM6-P8-S9 212.0	AUM6-P8-S9	757	1755 / 12150						
	AUM6-P7-S10	841	1950 / 13500						
	AUM6-P8-S12	1009	2340 / 16200						

● No hall sensor.
 ● Continuous force is measured under the condition of self-cooling. Please refer to the detail parameters table for the continuous force under the condition of air cooling or water cooling.


AUM1

Performance Parameters	Symbol	Unit	AUM1-S1	AUM1-S2	AUM1-S3	AUM1-S4	AUM1-S5
			Series	Series	Series	Series	Series
Continuous Force (NC) @100°C	F _{cn}	N	3.0	6.0	8.9	11.9	14.9
Peak Force	F _{pk}	N	11.9	23.8	35.7	47.6	59.5
Force Constant ±10%	K _f	N/Arms	1.75	3.50	5.25	7.00	8.75
Back EMF Constant ±10%	K _e	Vpeak/(m/s)	1.4	2.9	4.3	5.7	7.1
Motor Constant @25°C	K _m	N/Sqrt(W)	1.5	2.1	2.5	2.9	3.1
Resistance (L-L) 25°C ±10%	R ₂₅	Ω	0.92	1.92	2.92	3.92	5.32
Inductance (L-L) ±40%	L	mH	0.11	0.22	0.31	0.41	0.55
Electrical Time Constant	T _e	ms	0.12	0.11	0.11	0.10	0.10
Continuous Current (NC) @100°C	I _{cn}	Arms	1.70	1.70	1.70	1.70	1.70
Peak Current	I _{pk}	Arms	6.80	6.80	6.80	6.80	6.80
Continuous Power Dissipation (NC) @100°C	P _{cn}	W	5.15	10.74	16.32	21.91	29.73
Max. Coil Temperature	T _{max}	°C	100	100	100	100	100
Thermal Dissipation Constant (NC)	K _{th}	W/°C	0.1	0.1	0.2	0.3	0.4
Max. Bus Voltage	U _{bus}	Vdc	330	330	330	330	330
Magnetic Period	T _{SN}	mm	21.0	21.0	21.0	21.0	21.0
Attraction Force	F _a	kN	0	0	0	0	0


Mechanical Parameters		AUM1-S1	AUM1-S2	AUM1-S3	AUM1-S4	AUM1-S5
Coil Mass (NC)	m _{cn}	kg	0.025	0.050	0.075	0.100
Coil Length (NC)	L _{cn}	mm	22.0	43.0	64.0	85.0
Track Mass Per Meter	m _{track}	kg/m	2.37	2.37	2.37	2.37

Other Information		
Insulation Class	Class B (130°C)	
Protection Grade	IP00	
Compliance with Global Standards	RoHS, CE	
Ambient Temperature	Operation	0°C to 40°C (non-freezing)
	Storage	-15°C to 70°C (non-freezing)
Ambient Humidity	Operation	10%RH to 80%RH (non-condensing)
	Storage	10%RH to 90%RH (non-condensing)
Recommended Ambience	Indoor (no direct sunlight); No corrosive gas, inflammable gas, oil mist or dust.	

Dimension

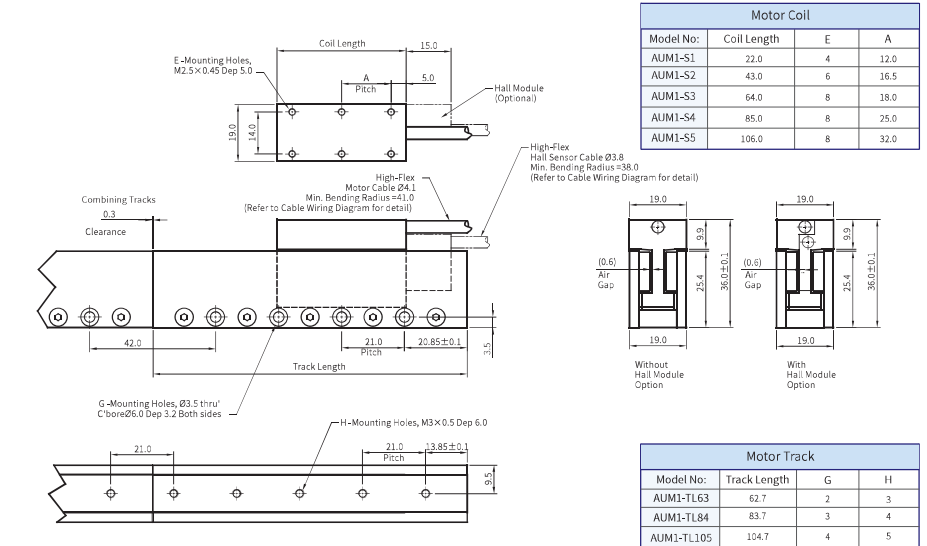


Force-Speed Curve

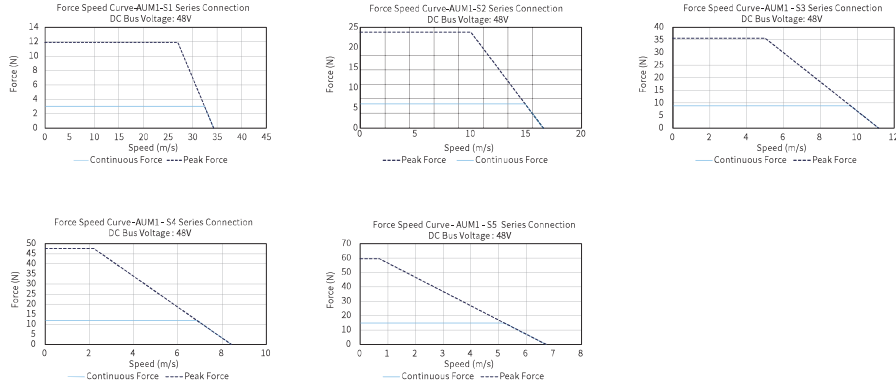

Part Numbering

Motor Coil

AUM1-S-S3-HF-0.5-FB

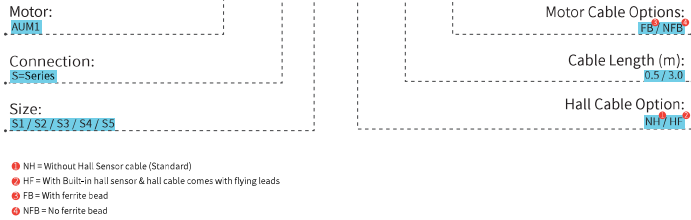

- NH = Without Hall Sensor cable (Standard)
- HF = With Built-in hall sensor & hall cable comes with flying leads
- FB = With ferrite bead
- NFB = No ferrite bead

Motor Track

AUM1-TL63




AUM2

Performance Parameters	Symbol	Unit	AUM2-S1		AUM2-S2		AUM2-S3		AUM2-S4		AUM2-S8	
			Series	Parallel	Series	Parallel	Series	Parallel	Series	Parallel		
Continuous Force (NC) @100°C	F _{cn}	N	8.8	17.6	17.6	25.4	26.6	35.2	35.2	70.4	70.4	
Peak Force	F _{pk}	N	44.0	88.0	88.0	132.0	132.8	176.0	176.0	352.0	352.0	
Force Constant ±10%	K _f	N/Arms	5.5	11.0	5.5	16.5	8.3	22.0	11.0	44.0	22.0	
Back EMF Constant ±10%	K _e	Vpeak/(m/s)	4.5	9.0	4.5	13.5	6.8	18.0	9.0	35.9	18.0	
Motor Constant @25°C	K _m	N/Sqrt(W)	2.6	3.6	3.4	4.4	4.5	5.0	4.9	7.1	7.1	
Resistance (L-L) 25°C ±10%	R ₂₅	Ω	3.07	6.32	1.78	9.57	2.26	12.82	3.32	25.82	6.32	
Inductance (L-L) ±40%	L	mH	0.75	1.50	0.51	2.25	0.56	3.00	0.75	6.00	1.50	
Electrical Time Constant	T _e	ms	0.24	0.24	0.29	0.24	0.25	0.23	0.23	0.23	0.24	
Continuous Current (NC) @100°C	I _{cn}	Arms	1.6	1.6	3.2	1.6	3.2	1.6	3.2	1.6	3.2	
Peak Current	I _{pk}	Arms	8.0	8.0	16.0	8.0	16.0	8.0	16.0	8.0	16.0	
Continuous Power Dissipation (NC) @100°C	P _{cn}	W	15.2	31.3	35.3	47.4	44.7	63.5	65.8	127.8	125.1	
Max. Coil Temperature	T _{max}	°C	100	100	100	100	100	100	100	100	100	
Thermal Dissipation Constant (NC)	K _{th}	W/°C	0.2	0.4	0.5	0.6	0.6	0.8	0.9	1.7	1.7	
Max. Bus Voltage	U _{bus}	Vdc	330	330	330	330	330	330	330	330	330	
Magnetic Period	τ _{ML}	mm	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	
Attraction Force	F _a	kN	0	0	0	0	0	0	0	0	0	
Mechanical Parameters												
Coil Mass (NC)	m _{cn}	kg	0.06	0.12	0.12	0.18	0.18	0.24	0.24	0.47	0.47	
Coil Length (NC)	L _{cn}	mm	31.0	61.0	61.0	91.0	91.0	121	121	241	241	
Track Mass Per Meter	m _{track}	kg/m	3.90	3.90	3.90	3.90	3.90	3.90	3.90	3.90	3.90	
Other Information												
Insulation Class	Class B (130°C)											
Protection Grade	IP00											
Compliance with Global Standards	RoHS, CE											
Ambient Temperature	Operation	0°C to 40°C (non-freezing)										
	Storage	-15°C to 70°C (non-freezing)										
	Operation	10%RH to 80%RH (non-condensing)										
Ambient Humidity	Operation	10%RH to 90%RH (non-condensing)										
	Storage	10%RH to 90%RH (non-condensing)										
Recommended Ambience	Indoor (no direct sunlight); No corrosive gas, inflammable gas, oil mist or dust.											

- Measurement is taken at ambient temperature 25°C. Value depends on the thermal environment. Abbreviations: NC-Natural Cooling, AC-Air Cooling, WC-Water Cooling.
- Resistance is measured by DC current with standard 0.5 m cable.
- Inductance is measured by current frequency of 1 kHz. The variation range of AUM inductance is ±40% because three phase inductances are different. The value in the catalog is the average between the maximum and minimum values. For each phase, the variation range is ±20%. The contents of dataset are subject to change without prior notice.


Dimension

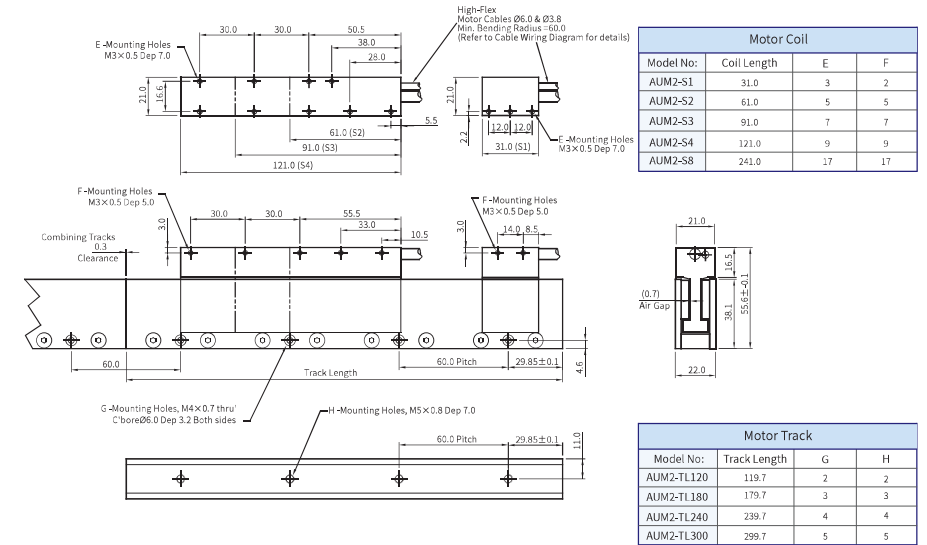

Introduction | Sizing Guide | Frequently Asked Questions | Linear Motors | Voice Coil Motors | Direct Drive Rotary Motors | Motion Control of Gantry Stages | Akribis systems

Introduction | Sizing Guide | Frequently Asked Questions | Linear Motors | Voice Coil Motors | Direct Drive Rotary Motors | Motion Control of Gantry Stages | Akribis systems


Force-Speed Curve

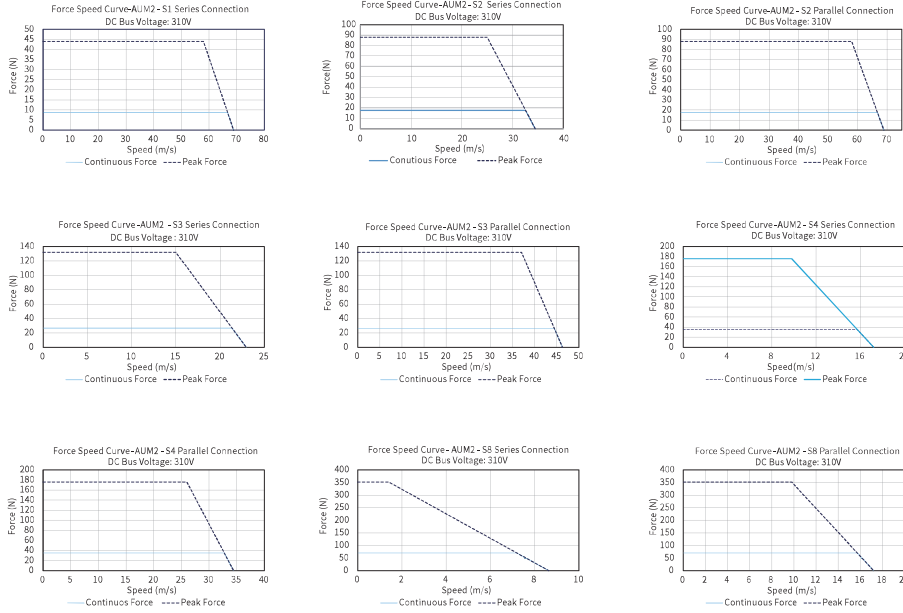

Part Numbering

Motor Coil

AUM2-S-S3-K-HF-0.5-FB

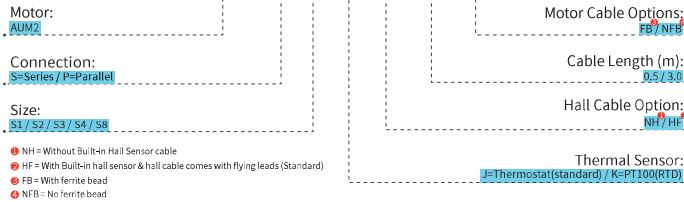

Motor Track

AUM2-TL120




AUM3

		AUM3-S1	AUM3-S2	AUM3-S3	AUM3-S4	AUM3-S6
Performance Parameters						
Continuous Force (NC) @100°C	F _{FN} N	28	57	85	85	113
Continuous Force (AC) @100°C	F _{CA} N	34	68	102	102	136
Continuous Force (WC) @100°C	F _{CW} N	37	73	110	110	147
Peak Force	F _{PK} N	144	289	433	433	578
Force Constant ±10%	K _f N/Arms	15.7	31.4	15.7	47.1	23.6
Back EMF Constant ±10%	K _e Vpeak/(m/s)	12.8	25.6	12.8	38.5	19.2
Motor Constant @25°C	K _m N/Sort(W)	5.8	8.4	8.0	10.0	11.9
Resistance (L-L) @25°C ±10%	R ₂₅ Ω	4.95	9.22	2.56	13.92	3.73
Inductance (L-L) ±40%	L	mH	3.13	6.26	1.57	9.39
Electrical Time Constant	T _e ms	0.63	0.68	0.61	0.67	0.63
Continuous Current (NC) @100°C	I _{FN} Arms	1.8	1.8	3.6	1.8	3.6
Continuous Current (AC) @100°C	I _{CA} Arms	2.2	2.2	4.3	2.2	4.3
Continuous Current (WC) @100°C	I _{CW} Arms	2.3	2.3	4.7	2.3	4.7
Peak Current	I _{PK} Arms	9.2	9.2	18.4	9.2	18.4
Continuous Power Dissipation (NC) @100°C	P _{FN} W	31.0	57.8	64.2	93.5	116.6
Continuous Power Dissipation (AC) @100°C	P _{CA} W	44.7	83.2	92.4	125.6	168.0
Continuous Power Dissipation (WC) @100°C	P _{CW} W	52.4	97.6	108.5	147.4	197.1
Max. Coil Temperature	T _{max} °C	100	100	100	100	100
Thermal Dissipation Constant (NC)	K _{thn} W/°C	0.4	0.8	0.9	1.2	1.6
Thermal Dissipation Constant (AC)	K _{thc} W/°C	0.6	1.1	1.2	1.7	2.2
Thermal Dissipation Constant (WC)	K _{thw} W/°C	0.7	1.3	1.4	2.0	2.6
Max. Bus Voltage	U _{bus} Vdc	330	330	330	330	330
Magnetic Period	T _{ms} mm	60	60	60	60	60
Attraction Force	F _a kN	0	0	0	0	0
Mechanical Parameters						
Coil Mass (NC)	m _{cn} kg	0.22	0.45	0.45	0.68	0.91
Coil Length (NC)	L _{cn} mm	61.0	121.0	121.0	181.0	241.0
Coil Length (AC)	L _{ca} mm	61.0	121.0	121.0	181.0	241.0
Coil Length (WC)	L _{cw} mm	61.0	121.0	121.0	181.0	241.0
Track Mass Per Meter	m _{track} kg/m	8.33	8.33	8.33	8.33	8.33
Other Information						
Insulation Class		Class B (130°C)				
Protection Grade		IP00				
Compliance with Global Standards		RoHS, CE				
Ambient Temperature	Operation	0°C to 40°C (non-freezing)				
	Storage	-15°C to 70°C (non-freezing)				
Ambient Humidity	Operation	10%RH to 80%RH (non-condensing)				
	Storage	10%RH to 90%RH (non-condensing)				
Recommended Ambience		Indoor (no direct sunlight), No corrosive gas, inflammable gas, oil mist or dust.				


- Measurement is taken at ambient temperature 25°C. Value depends on the thermal environment. Abbreviations: NC-Natural Cooling, AC-Air Cooling, WC-Water Cooling.
- Resistance is measured by DC current with standard 0.5 m cable.
- Inductance is measured by current frequency of 1 kHz. The variation range of AUM inductance is ±40% because three phase inductances are different. The value in the catalog is the average between the maximum and minimum values. For each phase, the variation range is ±20%. The contents of datasheet are subject to change without prior notice.

Dimension

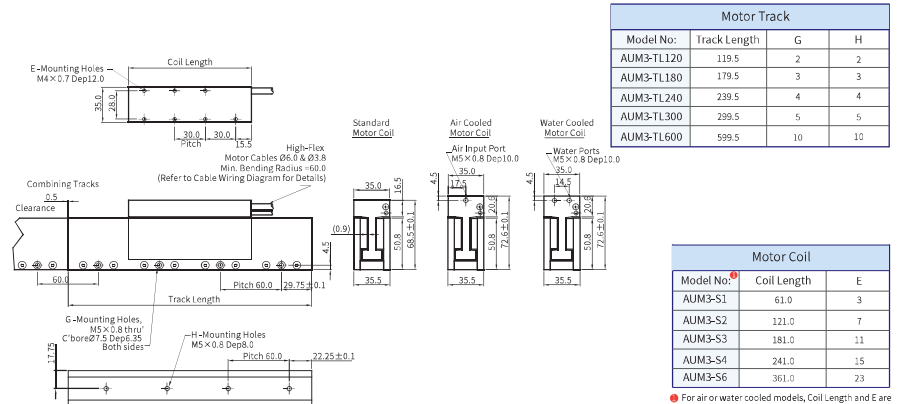

For air or water cooled models, Coil Length and E are the same as the standard model.


Force-Speed Curve

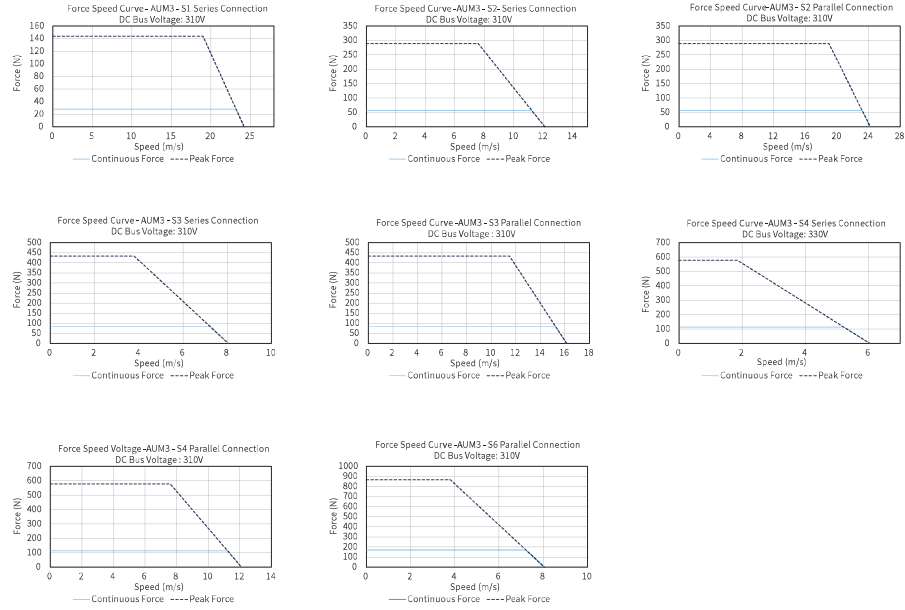

Part Numbering

Motor Coil

AUM3-S-S3-K-HF-0.5-FB

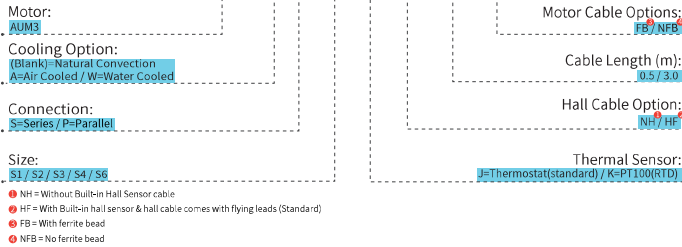

Motor Track

AUM3-TL120




AUM4

		AUM4-S1	AUM4-S2	AUM4-S3	AUM4-S4	AUM4-S5	AUM4-S6	AUM4-S8
Performance Parameters								
Continuous Force (NC) @100°C	F _{cn} N	55	110	110	166	221	276	331
Continuous Force (AC) @100°C	F _{ca} N	66	132	132	199	265	331	397
Continuous Force (WC) @100°C	F _{cw} N	72	144	144	215	287	359	431
Peak Force	F _{pk} N	312	624	624	936	1248	1560	1872
Force Constant ±10%	K _f N/Arms	24.0	48.0	24.0	72.0	36.0	96.0	48.0
Back EMF Constant ±10%	K _v V/sek/(m/s)	19.6	39.2	19.6	58.8	29.4	78.4	39.2
Motor Constant @25°C	K _m N·Sqrt(W)	9.3	13.0	12.7	15.9	15.7	18.4	18.6
Resistance (L-L) ±10%	R _{zs} Ω	4.42	9.02	2.37	13.62	3.52	18.22	4.42
Inductance (L-L) ±40%	L	mH	3.50	7.00	1.75	10.50	2.63	14.00
Electrical Time Constant	τ _e	ms	0.79	0.78	0.74	0.77	0.75	0.79
Continuous Current (NC) @100°C	I _{cn} Arms	2.3	2.3	4.6	2.3	4.6	2.3	4.6
Continuous Current (AC) @100°C	I _{ca} Arms	2.8	2.8	5.5	2.8	5.5	2.8	5.5
Continuous Current (WC) @100°C	I _{cw} Arms	3.0	3.0	6.0	3.0	6.0	3.0	6.0
Peak Current	I _{pk} Arms	13.0	13.0	26.0	13.0	26.0	13.0	26.0
Continuous Power Dissipation (NC) @100°C	P _{cn} W	45	92	97	139	144	186	181
Continuous Power Dissipation (AC) @100°C	P _{ca} W	65	133	140	201	207	268	260
Continuous Power Dissipation (WC) @100°C	P _{cw} W	76	156	164	235	243	315	306
Max. Coil Temperature	T _{max} °C	100	100	100	100	100	100	100
Thermal Dissipation Constant (NC)	K _{thn} W/°C	0.6	1.2	1.3	1.9	1.9	2.5	2.4
Thermal Dissipation Constant (AC)	K _{thca} W/°C	0.9	1.8	1.9	2.7	2.8	3.6	3.5
Thermal Dissipation Constant (WC)	K _{thcw} W/°C	1.0	2.1	2.2	3.1	3.2	4.2	4.1
Max. Bus Voltage	U _{bus} Vdc	330	330	330	330	330	330	330
Magnetic Period	T _{mn} mm	60	60	60	60	60	60	60
Attraction Force	F _a kN	0	0	0	0	0	0	0
Mechanical Parameters								
Coil Mass (NC)	m _{cn} kg	0.28	0.56	0.56	0.89	0.89	1.19	1.19
Coil Length (NC)	L _{cn} mm	61.0	121.0	121.0	181.0	181.0	241.0	301.0
Coil Length (AC)	L _{ca} mm	61.0	121.0	121.0	181.0	181.0	241.0	301.0
Coil Length (WC)	L _{cw} mm	61.0	121.0	121.0	181.0	181.0	241.0	301.0
Track Mass Per Meter	m _{trck} kg/m	14.75	14.75	14.75	14.75	14.75	14.75	14.75
Other Information								
Insulation Class	Class B (130°C)							
Protection Grade	IP00							
Compliance with Global Standards	RoHS, CE							
Ambient Temperature	Operation	0°C to 40°C (non-freezing)						
	Storage	-15°C to 70°C (non-freezing)						
Ambient Humidity	Operation	10%RH to 80%RH (non-condensing)						
	Storage	10%RH to 90%RH (non-condensing)						
Recommended Ambience	Indoor (no direct sunlight), No corrosive gas, inflammable gas, oil mist or dust.							

- Measurement is taken at ambient temperature 25°C. Value depends on the thermal environment. Abbreviations: NC=Natural Cooling, AC=Air Cooling, WC=Water Cooling.
- Resistance is measured by DC current with standard 0.5 m cable.
- Inductance is measured by current frequency of 1kHz. The variation range of AUM inductance is ±40% because three phase inductances are different. The value in the catalog is the average between the maximum and minimum values. For each phase, the variation range is ±20%. The contents of datasheet are subject to change without prior notice.

Dimension

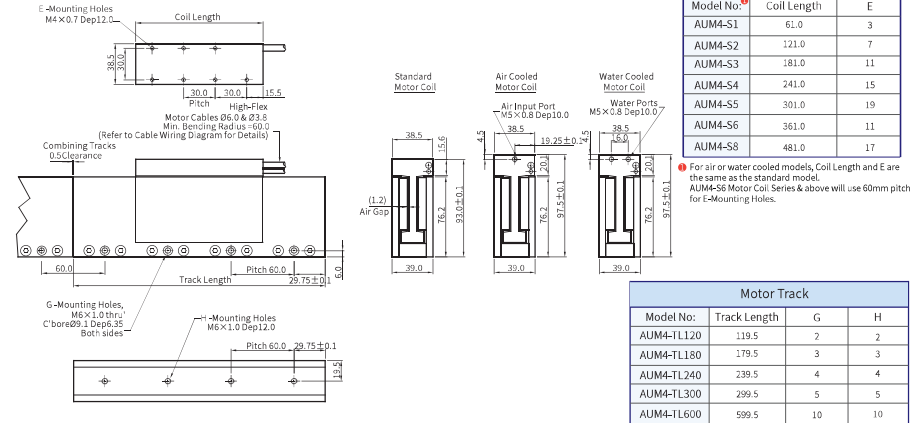











Introduction | Sizing Guide | Frequently Asked Questions | Linear Motors | Voice Coil Motors | Direct Drive Rotary Motors | Motion Control of Gantry Stages

Atrixis systems

Introduction | Sizing Guide | Frequently Asked Questions | Linear Motors | Voice Coil Motors | Direct Drive Rotary Motors | Motion Control of Gantry Stages

Atrixis systems

Force-Speed Curve

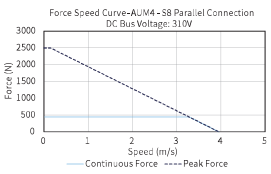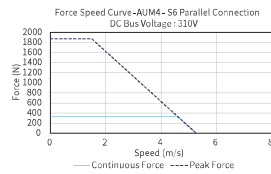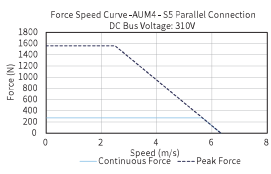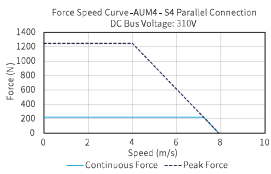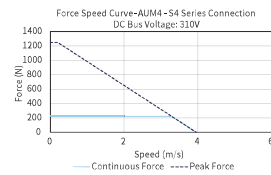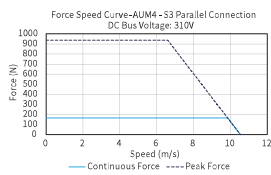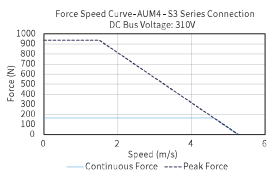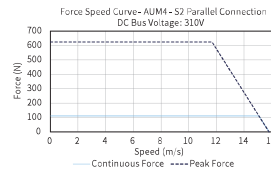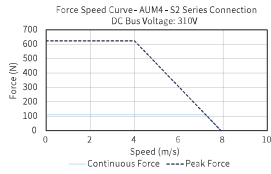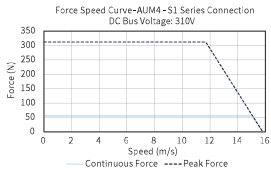

Part Numbering

Motor Coil

AUM4-S-S3-K-HF-0.5-FB

Motor: **AUM4**

Cooling Option: **(Blank)=Natural Convection / A=Air Cooled / W=Water Cooled**

Connection: **S=Series / P=Parallel**

Size: **S2 / S3 / S4 / S6**

Motor Cable Options: **FB / NFB**

Cable Length (m): **0.5 / 3.0**

Hall Cable Option: **NH / HF**

Thermal Sensor: **J=Thermostat(standard) / K=PT100(RTD)**

- NH = Without Built-in Hall Sensor cable
- HF = With Built-in hall sensor & hall cable comes with flying leads (Standard)
- FB = With ferrite bead
- NFB = No ferrite bead

Motor Track

AUM4-TL120

Model: **AUM4**

Track Length: **TL120 / TL180 / TL240 / TL300 / TL600**

AUM5


		AUM5-S1	AUM5-S2	AUM5-S3	AUM5-S4	AUM5-S5	AUM5-S6	AUM5-S8 -V107	AUM5-S9 -V80	AUM5-S10 -V107	AUM5-S12 -V107
Performance Parameters											
Continuous Force (NC) @100°C	F _{cn}	N	98	197	197	295	295	393	393	491	590
Continuous Force (AC) @100°C	F _{ca}	N	118	236	236	354	354	472	472	590	707
Continuous Force (WC) @100°C	F _{cw}	N	128	255	255	383	383	511	511	639	766
Peak Force	F _{pk}	N	707	1415	1415	2122	2122	2830	2830	3537	4244
Force Constant ±10%	K _f	N/Arms	39.3	78.6	39.3	117.9	59.0	157.2	78.6	117.9	78.6
Back EMF Constant ±10%	K _e	V/(rpm/100)	32.1	64.2	32.1	96.3	48.1	128.4	64.2	96.3	64.2
Motor Constant @25°C	K _{tm}	N/(Sqrt(W))	16.0	22.4	21.9	27.3	27.9	31.5	32.0	35.6	38.9
Resistance (L-L) @25°C ±10%	R ₂₅	Ω	4.02	8.22	2.15	12.42	2.97	16.62	4.02	5.07	6.12
Inductance (L-L) ±40%	L	mH	6.50	13.00	3.25	19.50	4.88	26.00	6.50	8.13	9.75
Electrical Time Constant	τ _e	ms	1.62	1.58	1.51	1.57	1.64	1.56	6.50	1.60	1.59
Continuous Current (NC) @100°C	I _{cn}	Arms	2.5	2.5	5.0	2.5	5.0	2.5	5.0	5.0	10.0
Continuous Current (AC) @100°C	I _{ca}	Arms	3.0	3.0	6.0	3.0	6.0	3.0	6.0	6.0	12.0
Continuous Current (WC) @100°C	I _{cw}	Arms	3.3	3.3	6.5	3.3	6.5	3.3	6.5	6.5	13.0
Peak Current	I _{pk}	Arms	18.0	18.0	36.0	18.0	36.0	18.0	36.0	36.0	72.0
Continuous Power Dissipation (NC) @100°C	P _{cn}	W	49	99	104	150	144	201	194	245	296
Continuous Power Dissipation (AC) @100°C	P _{ca}	W	70	143	150	216	207	289	280	353	426
Continuous Power Dissipation (WC) @100°C	P _{cw}	W	82	168	176	254	243	339	328	414	500
Max. Coil Temperature	T _{max}	°C	100	100	100	100	100	100	100	100	100
Thermal Dissipation Constant (NC)	K _{thn}	W/°C	0.6	1.3	1.4	2.0	1.9	2.7	2.6	3.3	3.9
Thermal Dissipation Constant (AC)	K _{tha}	W/°C	0.9	1.9	2.0	2.9	2.8	3.9	3.7	4.7	5.7
Thermal Dissipation Constant (WC)	K _{thw}	W/°C	1.1	2.2	2.3	3.4	3.2	4.5	4.4	5.5	6.7
Max. Bus Voltage	U _{bus}	Vdc	330	330	330	330	330	330	330	330	330
Magnetic Period	T _M	mm	84	84	84	84	84	84	84	84	84
Attraction Force	F _A	N	0	0	0	0	0	0	0	0	0

Mechanical Parameters											
Coil Mass (NC)	m _{cn}	kg	0.73	1.45	1.45	2.16	2.16	2.88	2.88	3.60	4.32
Coil Length (NC)	L _{cn}	mm	61.0	121.0	121.0	181.0	181.0	241.0	241.0	301.0	361.0
Coil Length (AC)	L _{ca}	mm	61.0	121.0	121.0	181.0	181.0	241.0	241.0	301.0	361.0
Coil Length (WC)	L _{cw}	mm	61.0	121.0	121.0	181.0	181.0	241.0	241.0	301.0	361.0
Track Mass Per Meter	m _{track}	kg/m	25.36	25.36	25.36	25.36	25.36	25.36	25.36	25.36	25.36

Other Information			
Insulation Class	Class B (130°C)		
Protection Grade	IP00		
Compliance with Global Standards	RoHS, CE		
Ambient Temperature	Operation	0°C to 40°C (non-freezing)	
	Storage	-15°C to 70°C (non-freezing)	
Ambient Humidity	Operation	10%RH to 80%RH (non-condensing)	
	Storage	10%RH to 90%RH (non-condensing)	
Recommended Ambience	Indoor (no direct sunlight); No corrosive gas, inflammable gas, oil mist or dust.		

- Measurement is taken at ambient temperature 25°C. Value depends on the thermal environment. Abbreviations: NC-Natural Cooling, AC-Air Cooling, WC-Water Cooling.
- Resistance is measured by DC current with standard 0.5m cable.
- Inductance is measured by current frequency of 1 kHz. The variation range of AUM inductance is ±40% because three phase inductances are different. The value in the catalog is the average between the maximum and minimum values. For each phase, the variation range is ±20%. The contents of datasheet are subject to change without prior notice.

Dimension

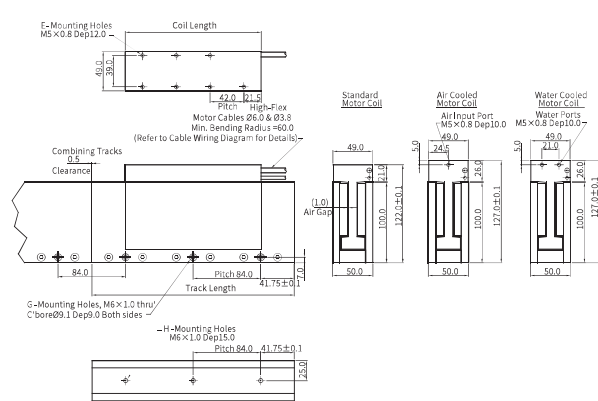


Motor Coil		
Model No.	Coil Length	E
AUM5-S2	169.0	7
AUM5-S3	253.0	11
AUM5-S4	337.0	15
AUM5-S5	421.0	19
AUM5-S6	505.0	23
AUM5-P5-S8-V107	673.0	8
AUM5-P7-S9-V80	757.0	9
AUM5-P5-S10-V107	841.0	10
AUM5-P5-S12-V107	1009.0	12

For air or water cooled models, Coil Length and E are the same as the standard model.

Motor Track			
Model No.	Track Length	G	H
AUM5-TL168	167.5	2	2
AUM5-TL252	251.5	3	3
AUM5-TL420	419.5	5	5

Force-Speed Curve

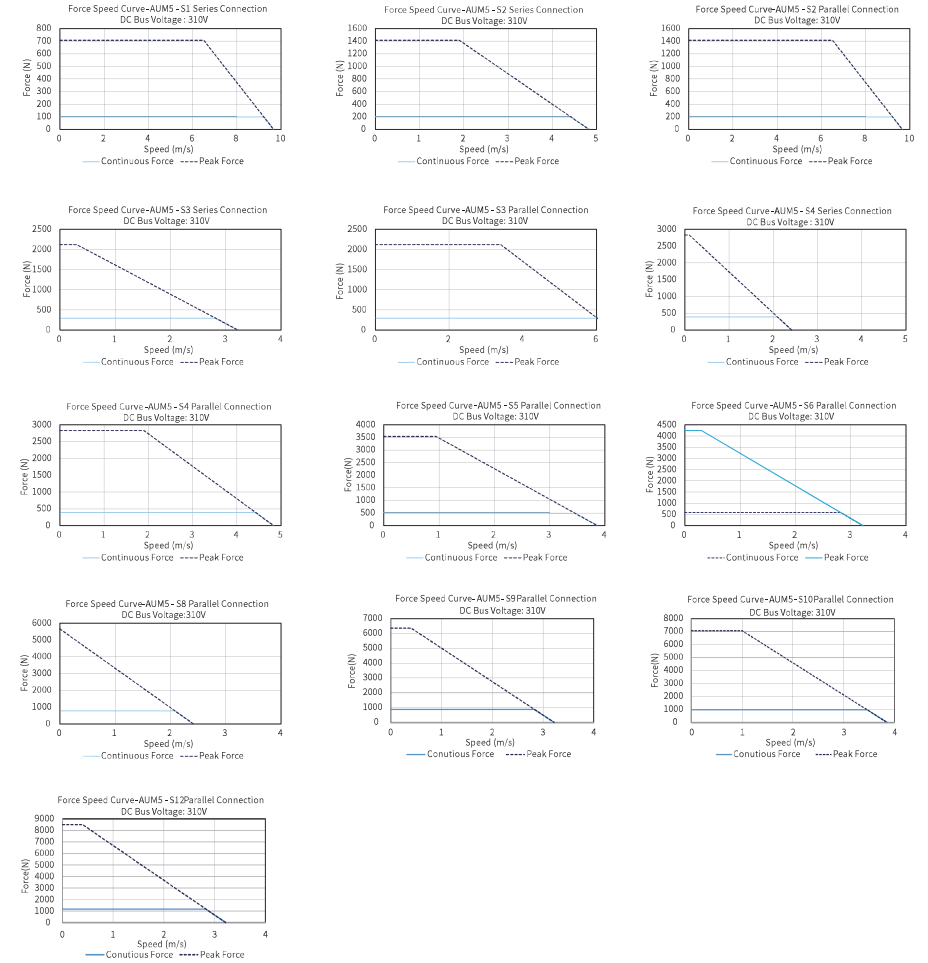


Introduction Sizing Guide Frequently Asked Questions Linear Motors Voice Coil Motors Direct Drive Rotary Motors Motion Control of Gantry Stages Artixis systems

Introduction Sizing Guide Frequently Asked Questions Linear Motors Voice Coil Motors Direct Drive Rotary Motors Motion Control of Gantry Stages Artixis systems

Part Numbering

Motor Coil

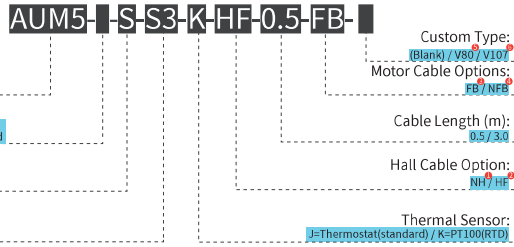

- NH = Without Built-in Hall Sensor cable
- HF = With Built-in hall sensor & hall cable comes with flying leads (Standard)
- FB = With ferrite bead
- NFB = No ferrite bead
- V80 = Only for AUM5-S8 and AUM5-S9
- V107 = Only for AUM5-S10 & AUM5-S12

Motor Track




AUM6

			AUM6-P5-S4	AUM6-P8-S6	AUM6-P5-S8	AUM6-P8-S9	AUM6-P7-S10	AUM6-P8-S12
Performance Parameters								
Continuous Force (NC) @100°C	F _{cn}	N	780	1170	1560	1755	1950	2340
Peak Force	F _{pk}	N	5400	8100	10800	12150	13500	16200
Force Constant ±10%	K _f	N/Arms	75.0	75.0	150.0	112.5	150.0	150.0
Back EMF Constant ±10%	K _e	Vpeak(m/s)	61.2	61.2	122.5	91.9	122.5	122.5
Motor Constant @25°C	K _m	N/Sqrt(W)	53.3	67.5	72.9	79.9	82.2	90.7
Resistance (L-L) @25°C ±10%	R ₂₅	Ω	1.32	0.82	2.82	1.32	2.22	1.82
Inductance (L-L) ±40%	L	mH	2.65	1.77	5.30	2.65	4.24	3.53
Electrical Time Constant	τ _e	ms	2.00	2.15	1.88	2.00	1.91	1.94
Continuous Current (NC) @100°C	I _{cn}	Arms	10.4	15.6	10.4	15.6	13.0	15.6
Peak Current	I _{pk}	Arms	72.0	108.0	72.0	108.0	90.0	108.0
Continuous Power Dissipation (NC) @100°C	P ₂₅	W	276	387	590	622	726	857
Max. Coil Temperature	T _{max}	°C	100	100	100	100	100	100
Thermal Dissipation Constant (NC)	K _{th}	W/°C	3.7	5.2	7.9	8.3	9.7	11.4
Max. Bus Voltage	U _{bus}	Vdc	330	330	330	330	330	330
Magnetic Period	T _{0.5}	mm	84	84	84	84	84	84
Attraction Force	F _a	kN	0	0	0	0	0	0
Mechanical Parameters								
Coil Mass (NC)	m _{cn}	kg	4.50	6.75	9.00	10.13	11.25	13.50
Coil Length (NC)	L _{cn}	mm	337.0	505.0	673.0	757.0	841.0	1009.0
Track Mass Per Meter	m _{trck}	kg/m	66.67	66.67	66.67	66.67	66.67	66.67
Other Information								
Insulation Class	Class B (130°C)							
Protection Grade	IP00							
Compliance with Global Standards	RoHS, CE							
Ambient Temperature	Operation	0°C to 40°C (non-freezing)						
	Storage	-15°C to 70°C (non-freezing)						
Ambient Humidity	Operation	10%RH to 90%RH (non-condensing)						
	Storage	10%RH to 90%RH (non-condensing)						
Recommended Ambience	Indoor (no direct sunlight); No corrosive gas, inflammable gas, oil mist or dust.							

- Measurement is taken at ambient temperature 25°C. Value depends on the thermal environment. Abbreviations: NC=Natural Cooling, AC=Air Cooling, WC=Water Cooling.
- Resistance is measured by DC current with standard 0.5 m cable.
- Inductance is measured by current frequency of 1 kHz. The variation range of AUM inductance is ±40% because three phase inductances are different. The value in the catalog is the average between the maximum and minimum values. For each phase, the variation range is ±20%. The contents of datasheet are subject to change without prior notice.


Dimension

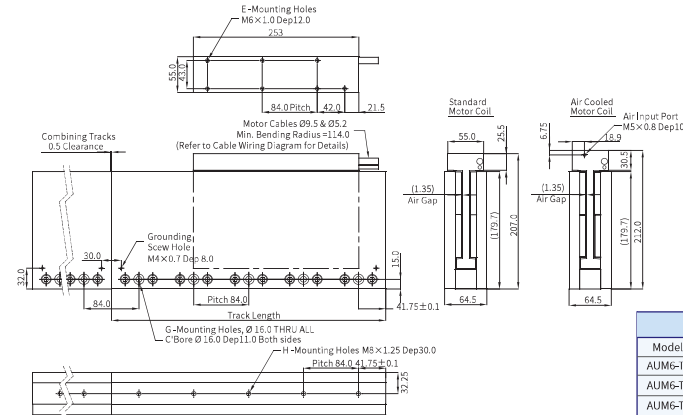


Motor Coil		
Model No.	Coil Length	E
AUM6-P5-S4	337.0	9
AUM6-P8-S6	505.0	13
AUM6-P5-S8	673.0	17
AUM6-P8-S9	757.0	19
AUM6-P7-S10	841.0	21
AUM6-P8-S12	1009.0	25

Motor Track			
Model No.	Track Length	G	H
AUM6-TL168	167.5	2	2
AUM6-TL252	251.5	3	3
AUM6-TL420	419.5	5	5

Force-Speed Curve

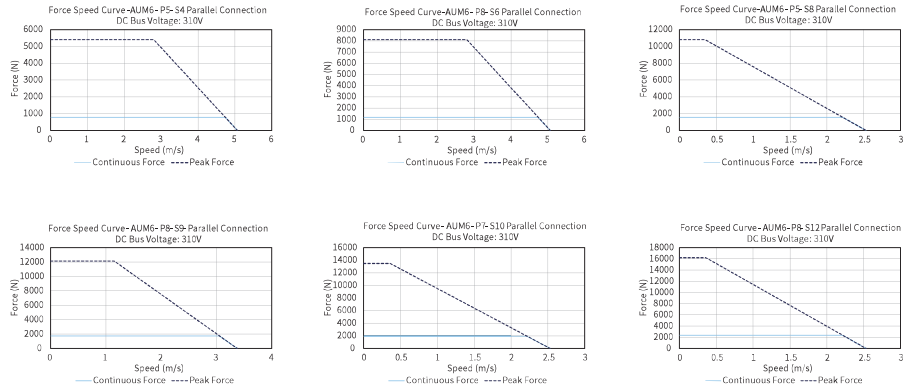


AUM1 Series Motor Cable Connection


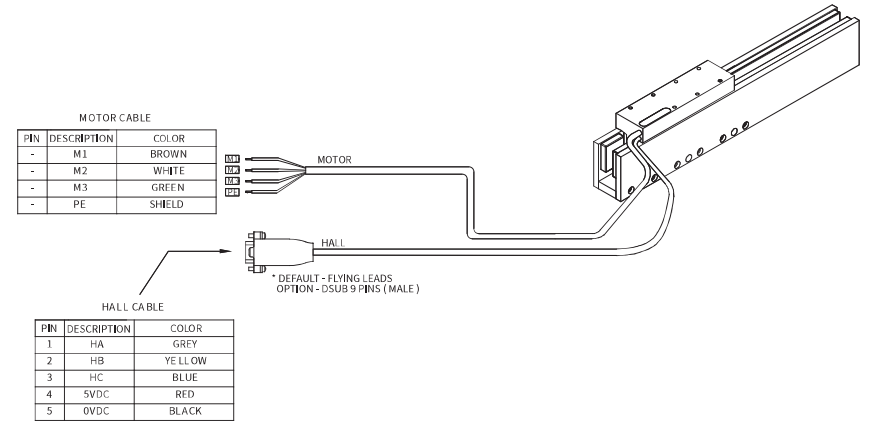


Part Numbering

Motor Coil

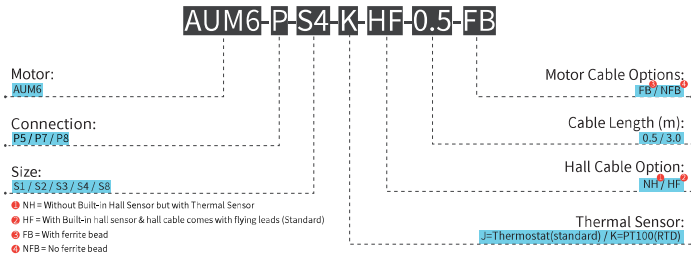



Motor Track

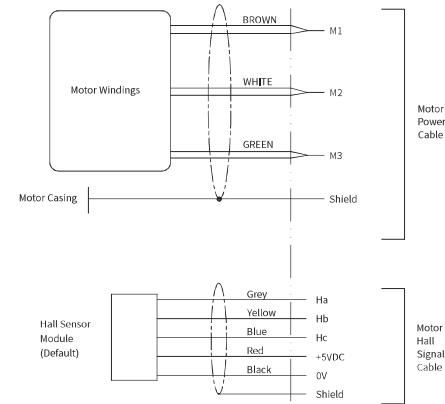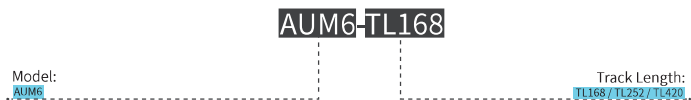



Introduction | Sizing Guide | Frequently Asked Questions | Linear Motors | Voice Coil Motors | Direct Drive Rotary Motors | Motion Control of Gantry Stages | Akribis systems

Introduction | Sizing Guide | Frequently Asked Questions | Linear Motors | Voice Coil Motors | Direct Drive Rotary Motors | Motion Control of Gantry Stages | Akribis systems

AUM2 / 3 / 4 / 5 Series Motor Cable Connection

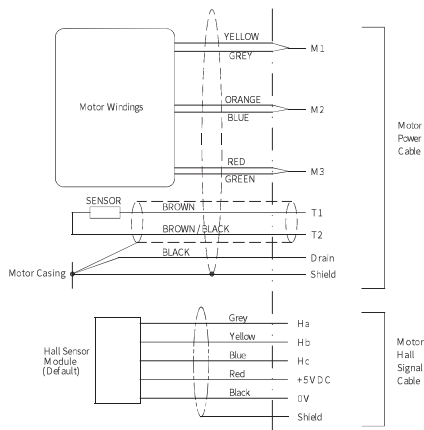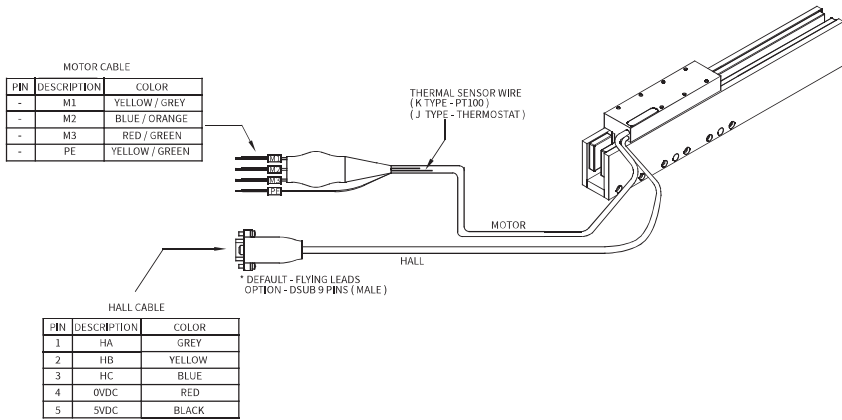

AUM6 Series Motor Cable Connection

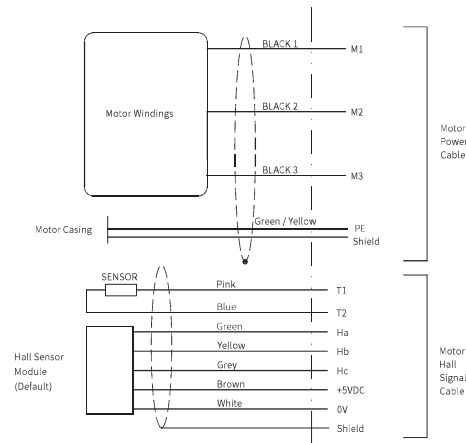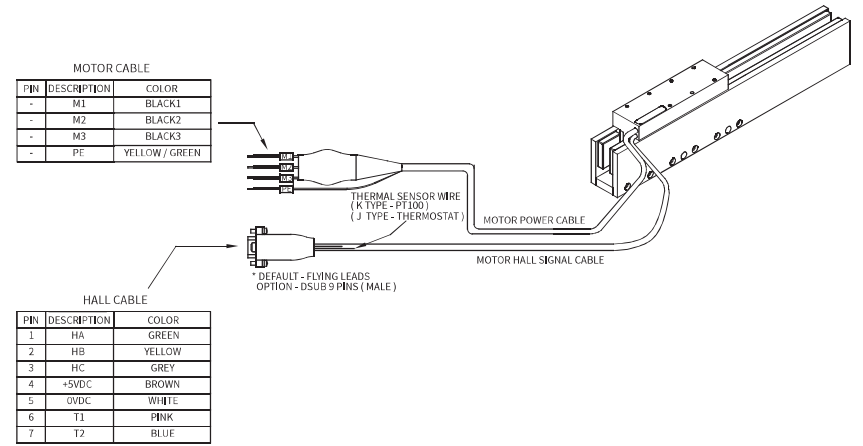

Introduction | Sizing Guide | Frequently Asked Questions | Linear Motors | Voice Coil Motors | Direct Drive Rotary Motors | Motion Control of Gantry Stages | Akrasis systems

Introduction | Sizing Guide | Frequently Asked Questions | Linear Motors | Voice Coil Motors | Direct Drive Rotary Motors | Motion Control of Gantry Stages | Akrasis systems